


NORDLAND®

- YKSILÖLLINEN MUOTOILU, KEVYT, HELPPOKÄYTTÖINEN
- KANAVA NUMEROINTI ÄÄNELLÄ
- VOX TOIMINTO, KÄDET VAPAANA "HF" TOIMINTO
- CTCSS/DCS TOIMINTO
- OHJELMOITAVAT NÄPPÄIMET
- 500mW AUDIO TEHO
- TNC ANTENNI LIITÄNTÄ

Working Frequency: 66~88MHz

ELK-68

PROFESSIONAL RADIO

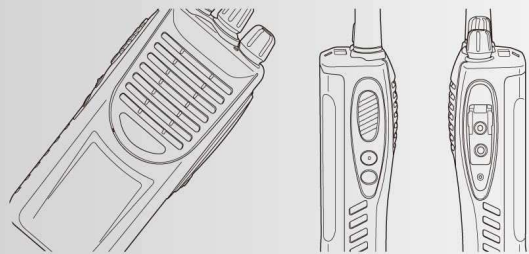

FC CE !

RoHS
Compliant



NORDLAND®

ELK-68 PROFESSIONAL RADIO

Tekniikkaa

General:

Frequency Range	66-88MHz
Number of Channels	16 Channels
Channel Spacing	Wide Band 25KHz, Narrow Band 12.5KHz
Channel Step	25KHz
Working Voltage	7.4 V DC (±20%)
Battery Life (5-5-90 duty cycle and close the save power)	More than 14 hours (1200mAh)
Working Temperature	-30°C to +60°C
Frequency Stability	±2.5ppm(-30°C to +60°C)
Antenna Impedance	50 Ω
Channel Frequency Spread	22 MHz
Size (W x H x D)	54 X 122 X 33mm (including battery)
Weight (Net Weight)	280 g (including battery and antenna)

Receiver (According to TIA/EIA-603 Standard Testing)

	Wide Band	Narrow Band
Sensitivity (12dB SINAD)	0.21µV	0.25µV
Selectivity	More than 65dB	More than 60dB
Intermodulation Distortion	More than 65dB	More than 60dB
Noise Respose	More than 65dB	60dB
Audio Power Output	500mW Less than 10%	

Transmitter (According to TIA/EIA-603 Standard Testing)

RF Power Output(H/L)	5W/1W	5W/1W
Spurious Response	Less than -70dB	
Modulation	16K c F3E	11 K c F3E
FM Noise	Less than -45dB	Less than -40dB
Audio distortion	Less than 5%	

Sorry for no further advise for changing the specification.

Standard Accessories



Pöytä latauslaite



Verkkolaite



Li-ion akku



Vyöpidike



Rannelenkki



Antenni

Optional Accessories



Monofoni



Jahtikaveri korvakaiutin



Kevyt pääsarja



Hy-Flex68 antenni



PROFESSIONAL RADIO

ELK-68